查询LP2950/D供应商

Order this document by LP2950/D

MOTOROLA

LP2950
LP2951

Micropower Voltage Regulators

MICROPOWER LOW DROPOUT VOLTAGE REGULATORS

The LP2950 and LP2951 are micropower voltage regulators that are specifically designed to maintain proper regulation with an extremely low input–to–output voltage differential. These devices feature a very low quiescent bias current of 75 μA and are capable of supplying output currents in excess of 100 mA. Internal current and thermal limiting protection is provided.

The LP2951 has three additional features. The first is the $\overline{\text{Error}}$ Output that can be used to signal external circuitry of an out of regulation condition, or as a microprocessor power–on reset. The second feature allows the output voltage to be preset to 5.0 V, 3.3 V or 3.0 V output (depending on the version) or programmed from 1.25 V to 29 V. It consists of a pinned out resistor divider along with direct access to the Error Amplifier feedback input. The third feature is a Shutdown input that allows a logic level signal to turn–off or turn–on the regulator output.

Due to the low input–to–output voltage differential and bias current specifications, these devices are ideally suited for battery powered computer, consumer, and industrial equipment where an extension of useful battery life is desirable. The LP2950 is available in the three pin case 29 and DPAK packages, and the LP2951 is available in the eight pin dual–in–line, SO–8 and Micro–8 surface mount packages. The 'A' suffix devices feature an initial output voltage tolerance ±0.5%.

LP2950 and LP2951 Features:

- Low Quiescent Bias Current of 75 μA
- Low Input–to–Output Voltage Differential of 50 mV at 100 μA and 380 mV at 100 mA
- 5.0 V, 3.3 V or 3.0 V ±0.5% Allows Use as a Regulator or Reference
- Extremely Tight Line and Load Regulation
- Requires Only a 1.0 μF Output Capacitor for Stability
- Internal Current and Thermal Limiting

LP2951 Additional Features:

- $\overline{\text{Error}}$ Output Signals an Out of Regulation Condition
- Output Programmable from 1.25 V to 29 V
- Logic Level Shutdown Input

(See Following Page for Ordering Information.)

Z SUFFIX
PLASTIC PACKAGE
CASE 29
(TO–226AA/TO–92)



Pin: 1. Output
2. Ground
3. Input

DT SUFFIX
PLASTIC PACKAGE
CASE 369A
(DPAK)





(Top View)

Pin: 1. Input
2. Ground
3. Output

Heatsink surface (shown as terminal 4 in case outline drawing) is connected to Pin 2.

D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO–8)



N SUFFIX
PLASTIC PACKAGE
CASE 626



DM SUFFIX
PLASTIC PACKAGE
CASE 846A
(Micro–8)

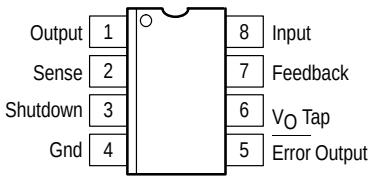

(Top View)

© Motorola, Inc. 1996

ORDERING INFORMATION

Device	Type	Operating Temperature Range	Package
LP2950CZ–** LP2950ACZ–**	Fixed Voltage (3.0, 3.3 or 5.0 V)	T_J = –40° to +125°C	TO–92/TO–226AA
LP2950CDT–** LP2950ACDT–**			DPAK
LP2951CD LP2951ACD	Adjustable or 5.0 V Fixed		SO–8
LP2951CD–** LP2951ACD–**	Adjustable or Fixed (3.0, 3.3 V)		
LP2951CN LP2951ACN	Adjustable or 5.0 V Fixed		Plastic
LP2951CN–** LP2951ACN–**	Adjustable or Fixed (3.0, 3.3 V)		
LP2951CDM LP2951ACDM	Adjustable or 5.0 V Fixed		Micro–8
LP2951CDM–** LP2951ACDM–**	Adjustable or Fixed (3.0, 3.3 V)		

** = Voltage option of 3.0, 3.3 or 5.0 V.

DEVICE TYPE/NOMINAL OUTPUT VOLTAGE

Device No. (±1%)	Device No. (±0.5%)	Nominal Voltage
LP2950CX–5.0	LP2950ACX–5.0	5.0
LP2950CX–3.3	LP2950ACX–3.3	3.3
LP2950CX–3.0	LP2950ACX–3.0	3.0
LP2951CX	LP2951ACX	Adjustable or 5.0
LP2950CX–3.3	LP2951ACX–3.3	Adjustable or 3.3
LP2951CX–3.0	LP2951ACX–3.0	Adjustable or 3.0

X = Package suffix.

Representative Block Diagrams

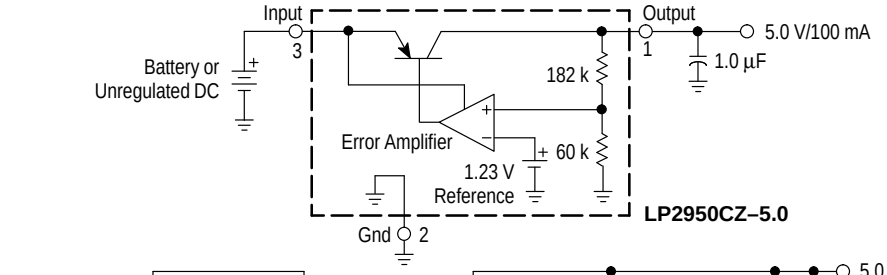

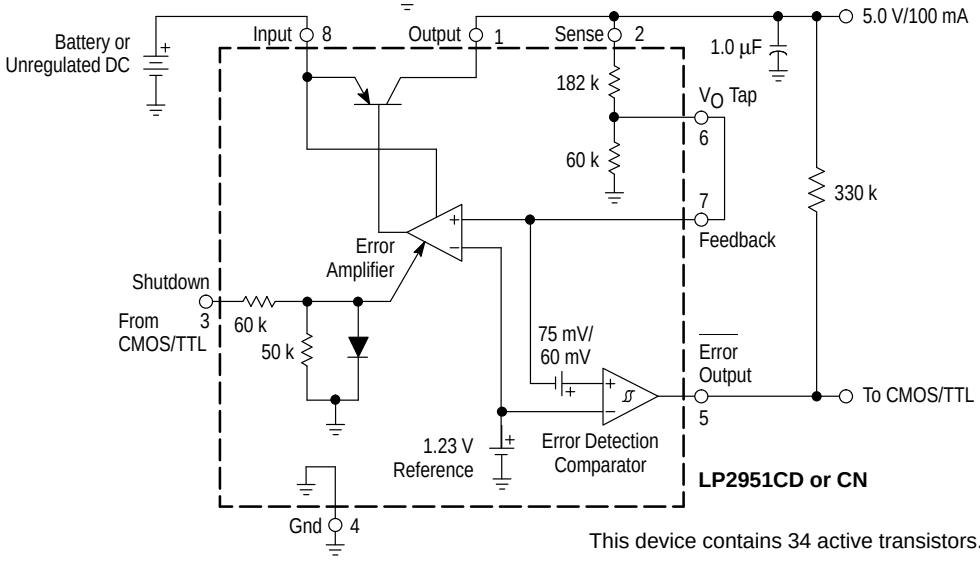

This device contains 34 active transistors.

MAXIMUM RATINGS (T_A = 25°C, unless otherwise noted.)

Rating	Symbol	Value	Unit
Input Voltage	V_{CC}	30	Vdc
Power Dissipation and Thermal Characteristics			
Maximum Power Dissipation	P_D	Internally Limited	W
Case 751(SO–8) D Suffix			
Thermal Resistance, Junction–to–Ambient	$R_{\theta JA}$	180	°C/W
Thermal Resistance, Junction–to–Case	$R_{\theta JC}$	45	°C/W
Case 369A (DPAK) DT Suffix [Note 1]			
Thermal Resistance, Junction–to–Ambient	$R_{\theta JA}$	92	°C/W
Thermal Resistance, Junction–to–Case	$R_{\theta JC}$	6.0	°C/W
Case 29 (TO–226AA/TO–92) Z Suffix			
Thermal Resistance, Junction–to–Ambient	$R_{\theta JA}$	160	°C/W
Thermal Resistance, Junction–to–Case	$R_{\theta JC}$	83	°C/W
Case 626 N Suffix			
Thermal Resistance, Junction–to–Ambient	$R_{\theta JA}$	105	°C/W
Case 846A (Micro–8) DM Suffix			
Thermal Resistance, Junction–to–Ambient	$R_{\theta JA}$	240	°C/W
Feedback Input Voltage	V_{fb}	–1.5 to +30	Vdc
Shutdown Input Voltage	V_{sd}	–0.3 to +30	Vdc
Error Comparator Output Voltage	V_{err}	–0.3 to +30	Vdc
Operating Junction Temperature	T_J	–40 to +125	°C
Storage Temperature Range	T_{stg}	–65 to +150	°C

NOTE: 1. The Junction–to–Ambient Thermal Resistance is determined by PC board copper area per Figure 26.
2. ESD data available upon request.

ELECTRICAL CHARACTERISTICS (V_{in} = V_O + 1.0 V, I_O = 100 μA, C_O = 1.0 μF, T_J = 25°C [Note 1], unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage, 5.0 V Versions	V_O				V
V_{in} = 6.0 V, I_O = 100 μA, T_J = 25°C					
LP2950C–5.0/LP2951C		4.950	5.000	5.050	
LP2950AC–5.0/LP2951AC		4.975	5.000	5.025	
T_J = –40 to +125°C					
LP2950C–5.0/LP2951C		4.900	–	5.100	
LP2950AC–5.0/LP2951AC		4.940	–	5.060	
V_{in} = 6.0 to 30 V, I_O = 100 μA to 100 mA, T_J = –40 to +125°C					
LP2950C–5.0/LP2951C		4.880	–	5.120	
LP2950AC–5.0/LP2951AC		4.925	–	5.075	
Output Voltage, 3.3 V Versions	V_O				V
V_{in} = 4.3 V, I_O = 100 μA, T_J = 25°C					
LP2950C–3.3/LP2951C–3.3		3.267	3.300	3.333	
LP2950AC–3.3/LP2951AC–3.3		3.284	3.300	3.317	
T_J = –40 to +125°C					
LP2950C–3.3/LP2951C–3.3		3.234	–	3.366	
LP2950AC–3.3/LP2951AC–3.3		3.260	–	3.340	
V_{in} = 4.3 to 30 V, I_O = 100 μA to 100 mA, T_J = –40 to +125°C					
LP2950C–3.3/LP2951C–3.3		3.221	–	3.379	
LP2950AC–3.3/LP2951AC–3.3		3.254	–	3.346	
Output Voltage, 3.0 V Versions	V_O				V
V_{in} = 4.0 V, I_O = 100 μA, T_J = 25°C					
LP2950C–3.0/LP2951C–3.0		2.970	3.000	3.030	
LP2950AC–3.0/LP2951AC–3.0		2.985	3.000	3.015	
T_J = –40 to +125°C					
LP2950C–3.0/LP2951C–3.0		2.940	–	3.060	
LP2950AC–3.0/LP2951AC–3.0		2.964	–	3.036	
V_{in} = 4.0 to 30 V, I_O = 100 μA to 100 mA, T_J = –40 to +125°C					
LP2950C–3.0/LP2951C–3.0		2.928	–	3.072	
LP2950AC–3.0/LP2951AC–3.0		2.958	–	3.042	

ELECTRICAL CHARACTERISTICS (continued) (V_{in} = V_O + 1.0 V, I_O = 100 µA, C_O = 1.0 µF, T_J = 25°C [Note 1], unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Line Regulation (V_{in} = $V_{O(nom)}$ +1.0 V to 30 V) [Note 2]	Reg_{line}				%
LP2950C–XX/LP2951C/LP2951C–XX		–	0.08	0.20	
LP2950AC–XX/LP2951AC/LP2951AC–XX		–	0.04	0.10	
Load Regulation (I_O = 100 µA to 100 mA)	Reg_{load}				%
LP2950C–XX/LP2951C/LP2951C–XX		–	0.13	0.20	
LP2950AC–XX/LP2951AC/LP2951AC–XX		–	0.05	0.10	
Dropout Voltage	$V_I – V_O$				mV
I_O = 100 µA		–	30	80	
I_O = 100 mA		–	350	450	
Supply Bias Current	I_{CC}				
I_O = 100 µA		–	93	120	µA
I_O = 100 mA		–	4.0	12	mA
Dropout Supply Bias Current (V_{in} = $V_{O(nom)}$ – 0.5 V, I_O = 100 µA) [Note 2]	$I_{CCdropout}$	–	110	170	µA
Current Limit (V_O Shorted to Ground)	I_{Limit}	–	220	300	mA
Thermal Regulation	$Reg_{thermal}$	–	0.05	0.20	%/W
Output Noise Voltage (10 Hz to 100 kHz) [Note 3]	V_n				µVrms
C_L = 1.0 µF		–	126	–	
C_L = 100 µF		–	56	–	
LP2951A/LP2951AC ONLY					
Reference Voltage (T_J = 25°C)	V_{ref}				V
LP2951C/LP2951C–XX		1.210	1.235	1.260	
LP2951AC/LP2951AC–XX		1.220	1.235	1.250	
Reference Voltage (T_J = –40 to +125°C)	V_{ref}				V
LP2951C/LP2951C–XX		1.200	–	1.270	
LP2951AC/LP2951AC–XX		1.200	–	1.260	
Reference Voltage (T_J = –40 to +125°C)	V_{ref}				V
I_O = 100 µA to 100 mA, V_{in} = 23 to 30 V					
LP2951C/LP2951C–XX		1.185	–	1.285	
LP2951AC/LP2951AC–XX		1.190	–	1.270	
Feedback Pin Bias Current	I_{FB}	–	15	40	nA
ERROR COMPARATOR					
Output Leakage Current (V_{OH} = 30 V)	I_{lkg}	–	0.01	1.0	µA
Output Low Voltage (V_{in} = 4.5 V, I_{OL} = 400 µA)	V_{OL}	–	150	250	mV
Upper Threshold Voltage (V_{in} = 6.0 V)	V_{thu}	40	45	–	mV
Lower Threshold Voltage (V_{in} = 6.0 V)	V_{thl}	–	60	95	mV
Hysteresis (V_{in} = 6.0 V)	V_{hy}	–	15	–	mV
SHUTDOWN INPUT					
Input Logic Voltage	V_{shtdn}				V
Logic “0” (Regulator “On”)		0	–	0.7	
Logic “1” (Regulator “Off”)		2.0	–	30	
Shutdown Pin Input Current	I_{shtdn}				µA
V_{shtdn} = 2.4 V		–	35	50	
V_{shtdn} = 30 V		–	450	600	
Regulator Output Current in Shutdown Mode (V_{in} = 30 V, V_{shtdn} = 2.0 V, V_O = 0, Pin 6 Connected to Pin 7)	I_{off}	–	3.0	10	µA

NOTES: 1. Low duty pulse techniques are used during test to maintain junction temperature as close to ambient as possible.
2. $V_{O(nom)}$ is the part number voltage option.
3. Noise tests on the LP2951 are made with a 0.01 µF capacitor connected across Pins 7 and 1.

DEFINITIONS

Dropout Voltage – The input/output voltage differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 100 mV below its nominal value (which is measured at 1.0 V differential), dropout voltage is affected by junction temperature, load current and minimum input supply requirements.

Line Regulation – The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

Load Regulation – The change in output voltage for a change in load current at constant chip temperature.

Maximum Power Dissipation – The maximum total device dissipation for which the regulator will operate within specifications.

Bias Current – Current which is used to operate the regulator chip and is not delivered to the load.

Output Noise Voltage – The rms ac voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

Leakage Current – Current drawn through a bipolar transistor collector–base junction, under a specified collector voltage, when the transistor is “off”.

Upper Threshold Voltage – Voltage applied to the comparator input terminal, below the reference voltage which is applied to the other comparator input terminal, which causes the comparator output to change state from a logic “0” to “1”.

Lower Threshold Voltage – Voltage applied to the comparator input terminal, below the reference voltage which is applied to the other comparator input terminal, which causes the comparator output to change state from a logic “1” to “0”.

Hysteresis – The difference between Lower Threshold voltage and Upper Threshold voltage.

Figure 1. Quiescent Current

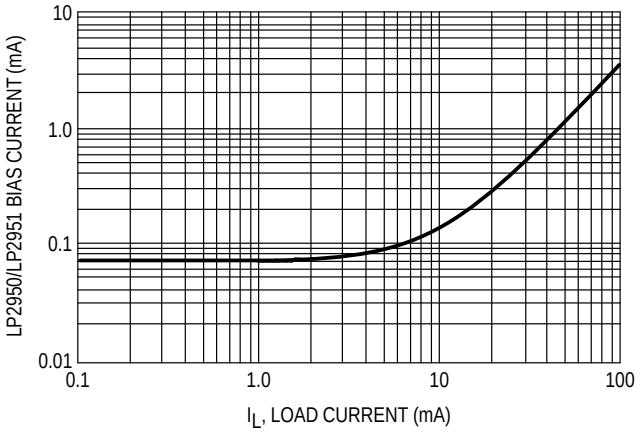

Figure 2. Dropout Characteristics

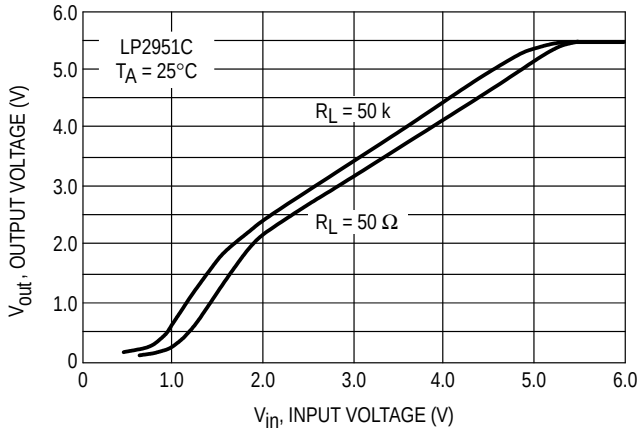

Figure 3. Input Current

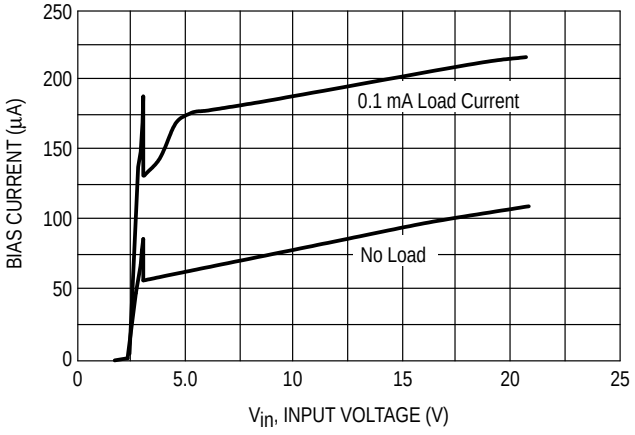

Figure 4. Output Voltage versus Temperature

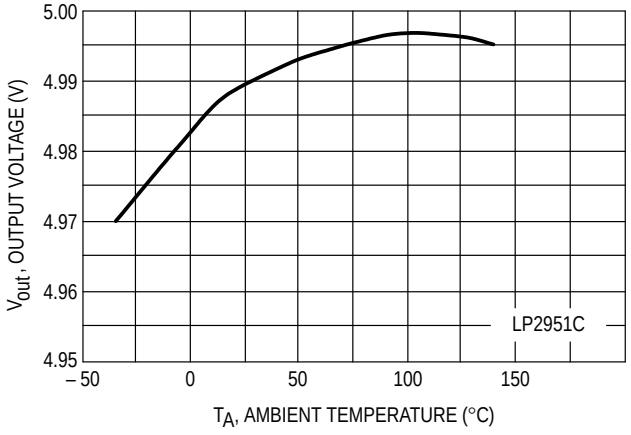

Figure 5. Dropout Voltage versus Output Current

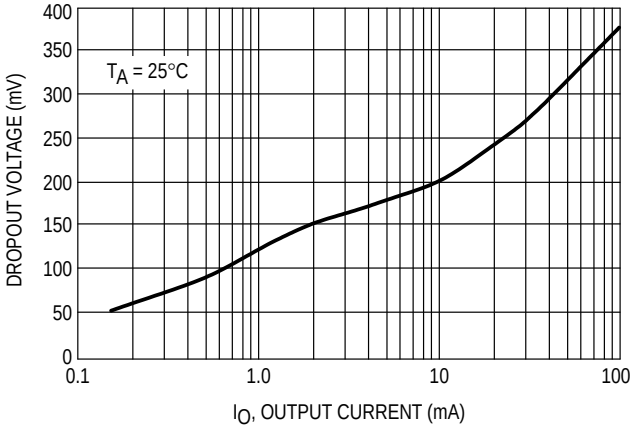

Figure 6. Dropout Voltage versus Temperature

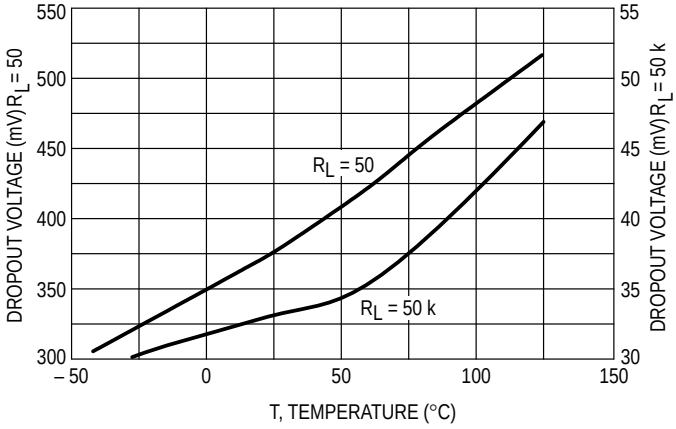

Figure 7. Error Comparator Output

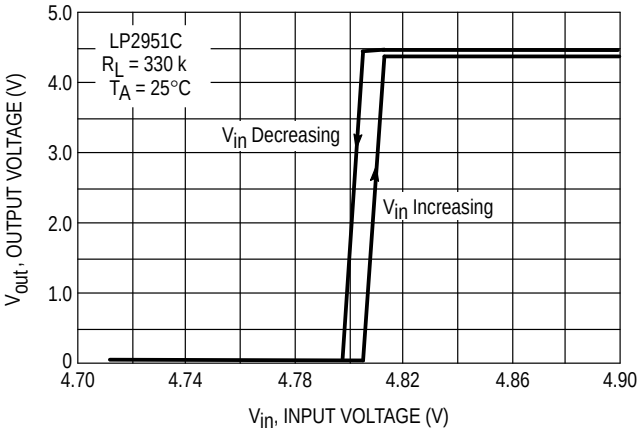

Figure 8. Line Transient Response

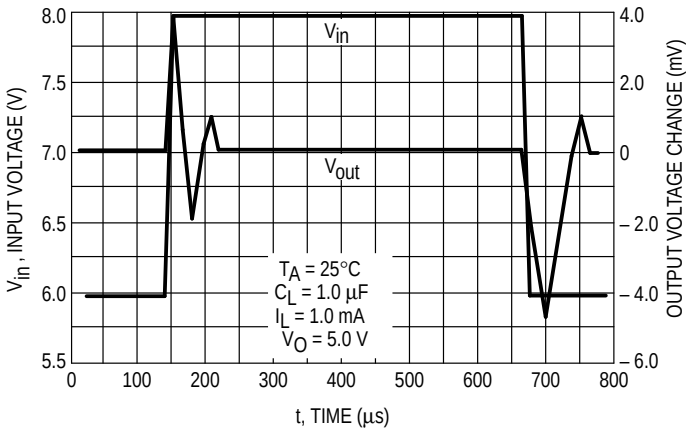

Figure 9. LP2951 Enable Transient

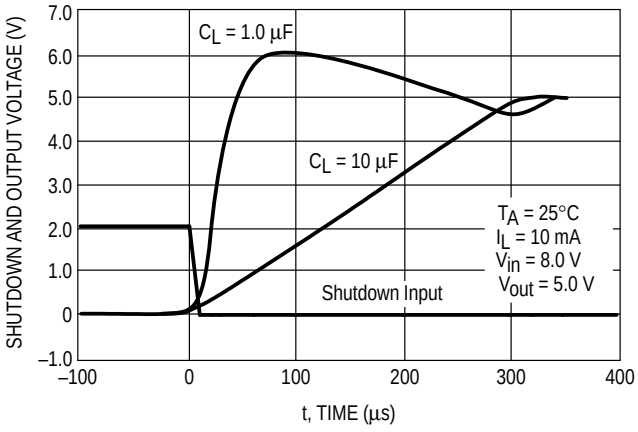

Figure 10. Load Transient Response

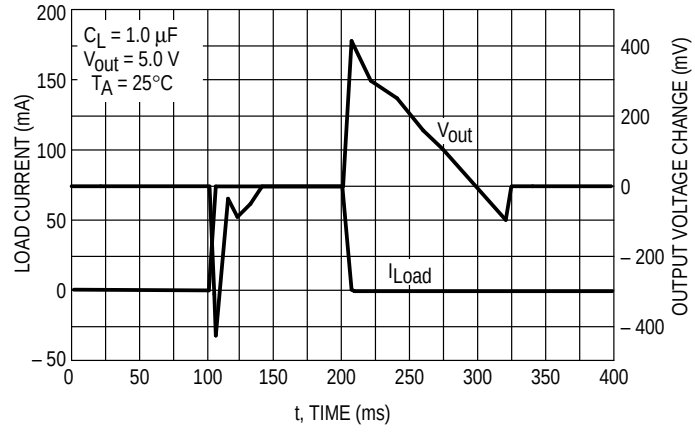

Figure 11. Ripple Rejection

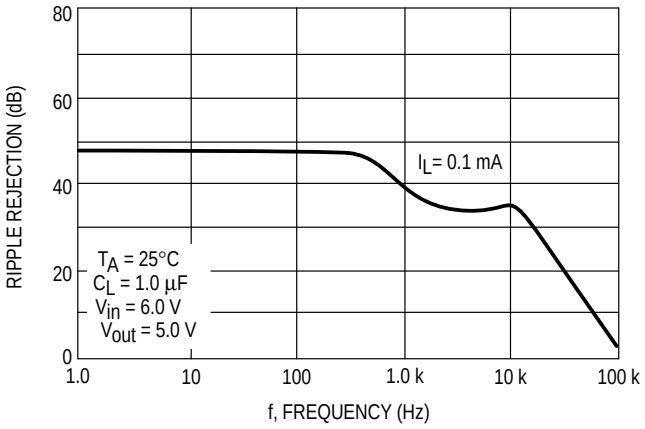

Figure 12. Output Noise

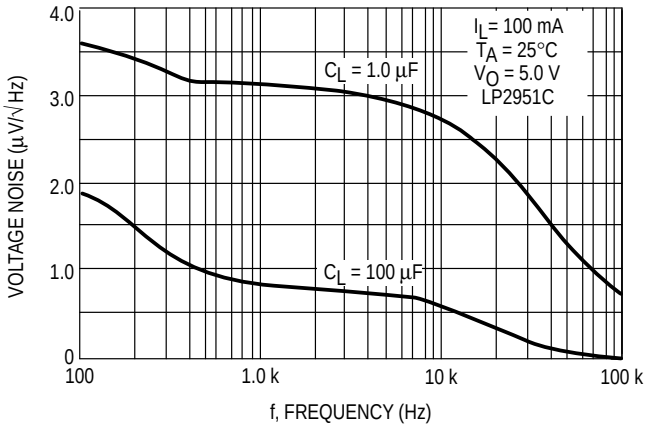

Figure 13. Shutdown Threshold Voltage versus Temperature

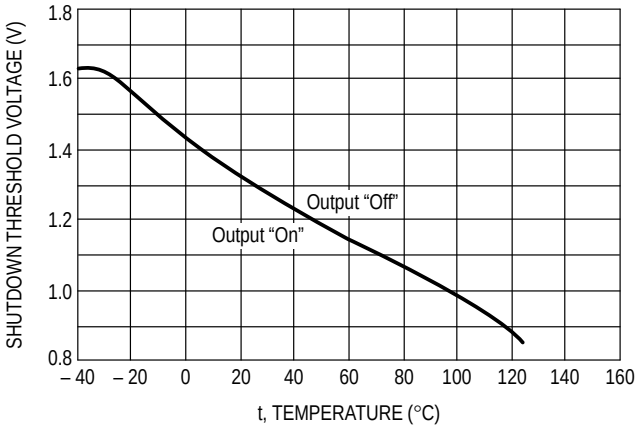

Figure 14. Maximum Rated Output Current

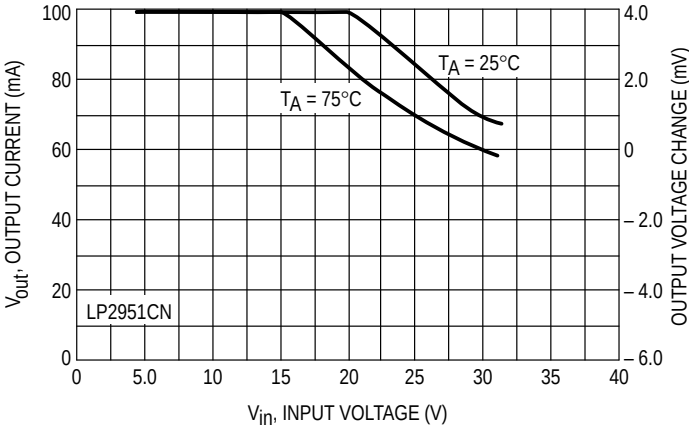

APPLICATIONS INFORMATION

Introduction

The LP2950/LP2951 regulators are designed with internal current limiting and thermal shutdown making them user–friendly. Typical application circuits for the LP2950 and LP2951 are shown in Figures 17 through 25.

These regulators are not internally compensated and thus require a 1.0 μF (or greater) capacitance between the LP2950/LP2951 output terminal and ground for stability. Most types of aluminum, tantalum or multilayer ceramic will perform adequately. Solid tantalums or appropriate multilayer ceramic capacitors are recommended for operation below 25°C.

At lower values of output current, less output capacitance is required for output stability. The capacitor can be reduced to 0.33 μF for currents less than 10 mA, or 0.1 μF for currents below 1.0 mA. Using the 8–pin versions at voltages less than 5.0 V operates the error amplifier at lower values of gain, so that more output capacitance is needed for stability. For the worst case operating condition of a 100 mA load at 1.23 V output (Output Pin 1 connected to the feedback Pin 7) a minimum capacitance of 3.3 μF is recommended.

The LP2950 will remain stable and in regulation when operated with no output load. When setting the output voltage of the LP2951 with external resistors, the resistance values should be chosen to draw a minimum of 1.0 μA.

A bypass capacitor is recommended across the LP2950/LP2951 input to ground if more than 4 inches of wire connects the input to either a battery or power supply filter capacitor.

Input capacitance at the LP2951 Feedback Pin 7 can create a pole, causing instability if high value external resistors are used to set the output voltage. Adding a 100 pF capacitor between the Output Pin 1 and the Feedback Pin 7 and increasing the output filter capacitor to at least 3.3 μF will stabilize the feedback loop.

Error Detection Comparator

The comparator switches to a positive logic low whenever the LP2951 output voltage falls more than approximately 5.0% out of regulation. This value is the comparator's designed–in offset voltage of 60 mV divided by the 1.235 V internal reference. As shown in the representative block diagram. This trip level remains 5.0% below normal regardless of the value of regulated output voltage. For example, the error flag trip level is 4.75 V for a normal 5.0 V regulated output, or 9.50 V for a 10 V output voltage.

Figure 1 is a timing diagram which shows the ERROR signal and the regulated output voltage as the input voltage to the LP2951 is ramped up and down. The ERROR signal becomes valid (low) at about 1.3 V input. It goes high when the input reaches about 5.0 V (V_{out} exceeds about 4.75 V). Since the LP2951's dropout voltage is dependent upon the load current (refer to the curve in the Typical Performance Characteristics), the input voltage trip point will vary with load current. The output voltage trip point does not vary with load.

The error comparator output is an open collector which requires an external pull–up resistor. This resistor may be returned to the output or some other voltage within the system. The resistance value should be chosen to be consistent with the 400 μA sink capability of the error comparator. A value between 100 k and 1.0 MΩ is suggested. No pull–up resistance is required if this output is unused.

When operated in the shutdown mode, the error comparator output will go high if it has been pulled up to an external supply. To avoid this invalid response, the error comparator output should be pulled up to V_{out} (see Figure 15).

Figure 15. ERROR Output Timing

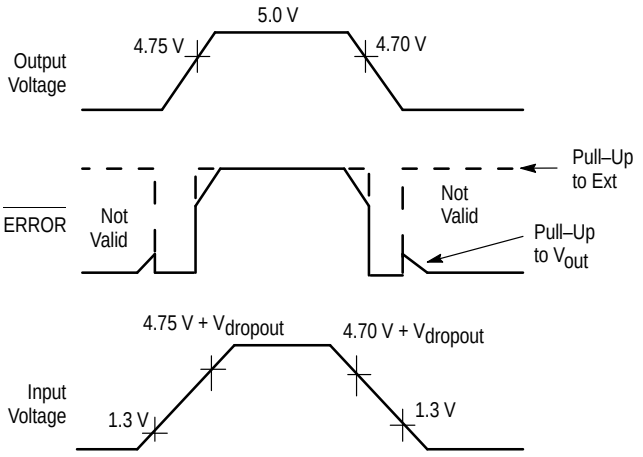

Programming the Output Voltage (LP2951)

The LP2951CX may be pin–strapped for 5.0 V using its internal voltage divider by tying Pin 1 (output) to Pin 2 (sense) and Pin 7 (feedback) to Pin 6 (5.0 V tap). Alternatively, it may be programmed for any output voltage between its 1.235 reference voltage and its 30 V maximum rating. An external pair of resistors is required, as shown in Figure 16.

Figure 16. Adjustable Regulator

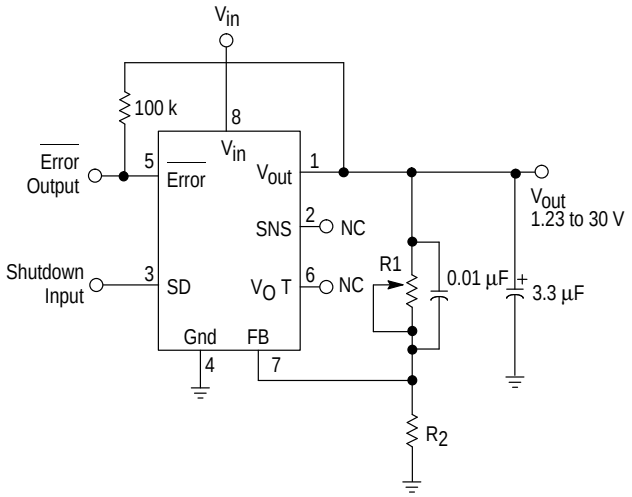

The complete equation for the output voltage is:

$$V_{out} = V_{ref} (1 + R1/R2) + I_{FB} R1$$

where V_{ref} is the nominal 1.235 V reference voltage and I_{FB} is the feedback pin bias current, nominally –20 nA. The minimum recommended load current of 1.0 μA forces an upper limit of 1.2 MΩ on the value of R2, if the regulator must work with no load. I_{FB} will produce a 2% typical error in V_{out} which may be eliminated at room temperature by adjusting R1. For better accuracy, choosing R2 = 100 k reduces this

error to 0.17% while increasing the resistor program current to 12 μA. Since the LP2951 typically draws 75 μA at no load with Pin 2 open circuited, the extra 12 μA of current drawn is often a worthwhile tradeoff for eliminating the need to set output voltage in test.

Output Noise

In many applications it is desirable to reduce the noise present at the output. Reducing the regulator bandwidth by increasing the size of the output capacitor is the only method for reducing noise on the 3 lead LP2950. However, increasing the capacitor from 1.0 μF to 220 μF only decreases the noise from 430 μV to 160 μVrms for a 100 kHz bandwidth at the 5.0 V output.

Noise can be reduced fourfold by a bypass capacitor across R1, since it reduces the high frequency gain from 4 to unity. Pick

$$C_{Bypass} \approx \frac{1}{2\pi R1 \times 200\ Hz}$$

or about 0.01 μF. When doing this, the output capacitor must be increased to 3.3 μF to maintain stability. These changes reduce the output noise from 430 μV to 126 μVrms for a 100 kHz bandwidth at 5.0 V output. With bypass capacitor added, noise no longer scales with output voltage so that improvements are more dramatic at higher output voltages.

Figure 17. 1.0 A Regulator with 1.2 V Dropout

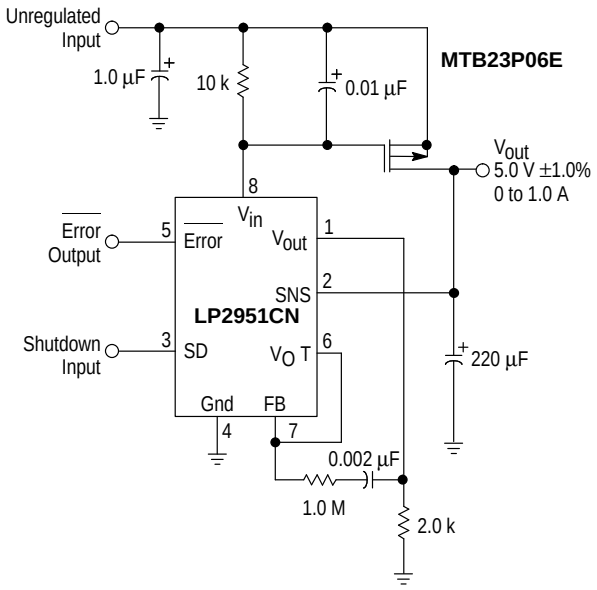

TYPICAL APPLICATIONS

Figure 18. Lithium Ion Battery Cell Charger

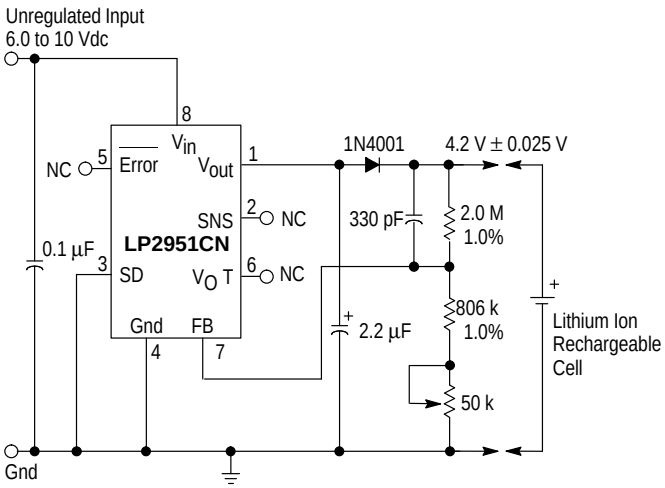

Figure 19. Low Drift Current Sink

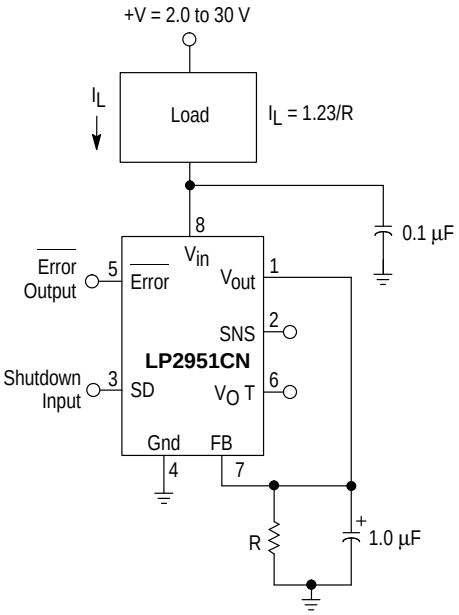

Figure 20. Latch Off When Error Flag Occurs

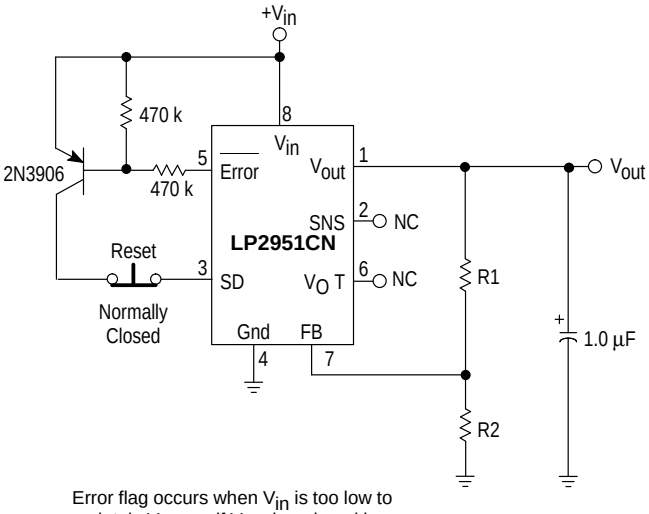

Error flag occurs when V_{in} is too low to maintain V_{out}, or if V_{out} is reduced by excessive load current.

Figure 21. 5.0 V Regulator with 2.5 V Sleep Function

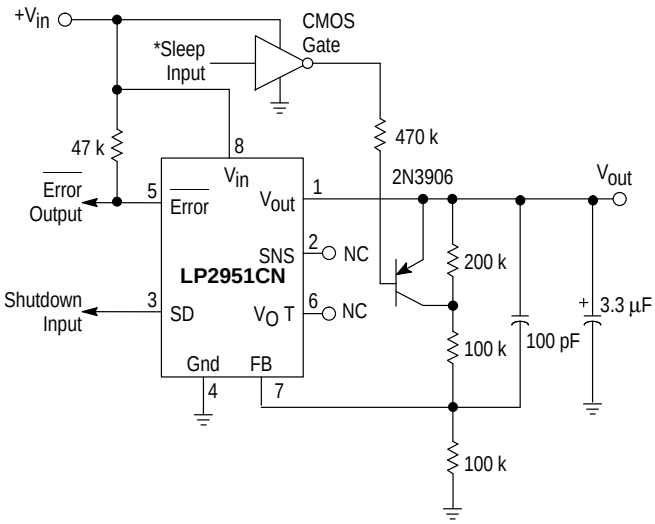

Figure 22. Regulator with Early Warning and Auxiliary Output

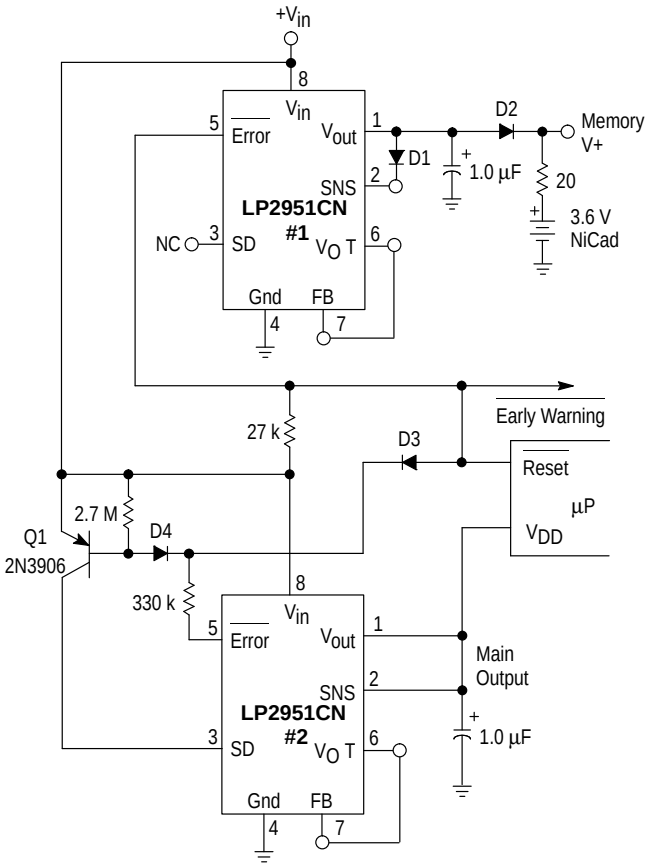

All diodes are 1N4148.

Early Warning flag on low input voltage.

Main output latches off at lower input voltages.

Battery backup on auxiliary output.

Operation: Regulator #1's V_{out} is programmed one diode drop above 5.0 V. Its error flag becomes active when $V_{in} \leq 5.7$ V. When V_{in} drops below 5.3 V, the error flag of regulator #2 becomes active and via Q1 latches the main output "off". When V_{in} again exceeds 5.7 V, regulator #1 is back in regulation and the early warning signal rises, unlatching regulator #2 via D3.

Figure 23. 2.0 A Low Dropout Regulator

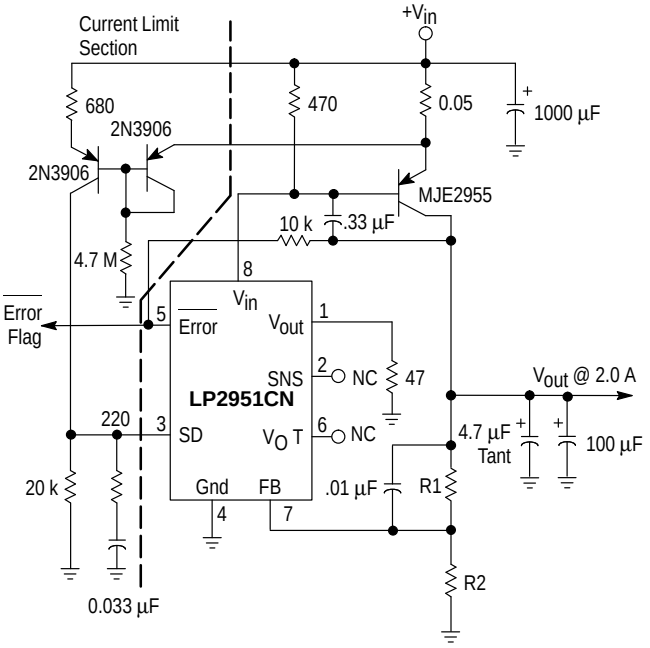

$V_{out} = 1.25V\ (1.0 + R1/R2)$

For 5.0 V output, use internal resistors. Wire Pin 6 to 7, and wire Pin 2 to $+V_{out}$ Bus.

Figure 24. Open Circuit Detector for 4.0 to 20 mA Current Loop

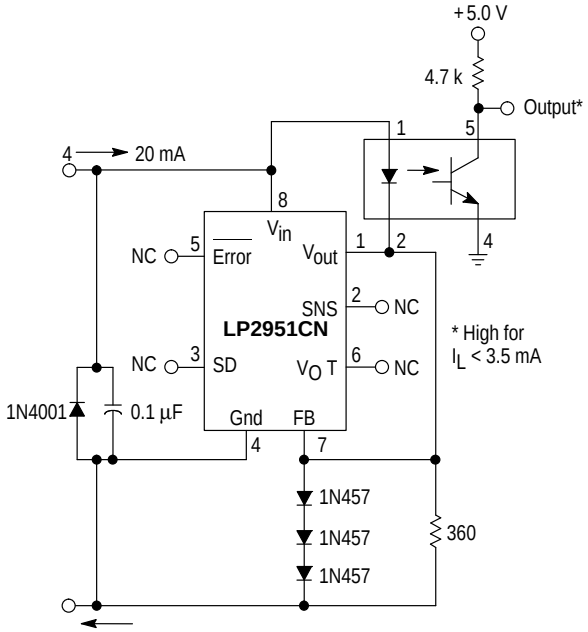

Figure 25. Low Battery Disconnect

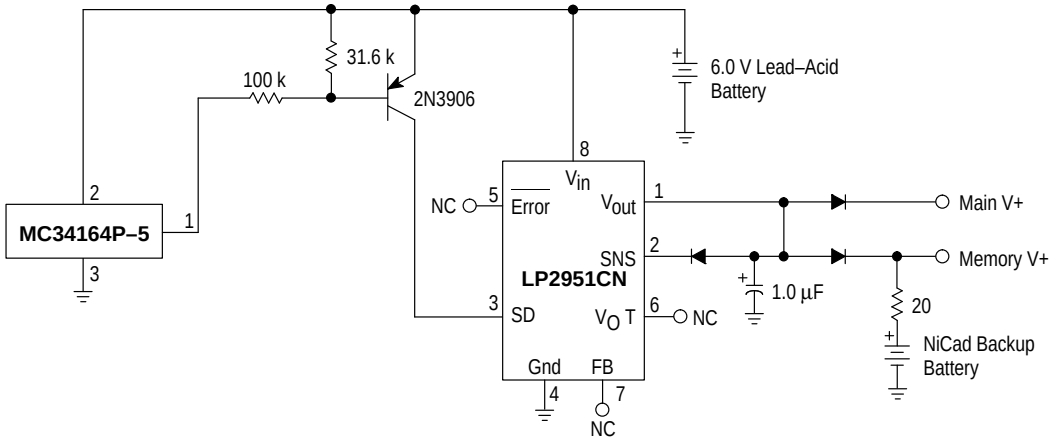

Figure 26. DPAK Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

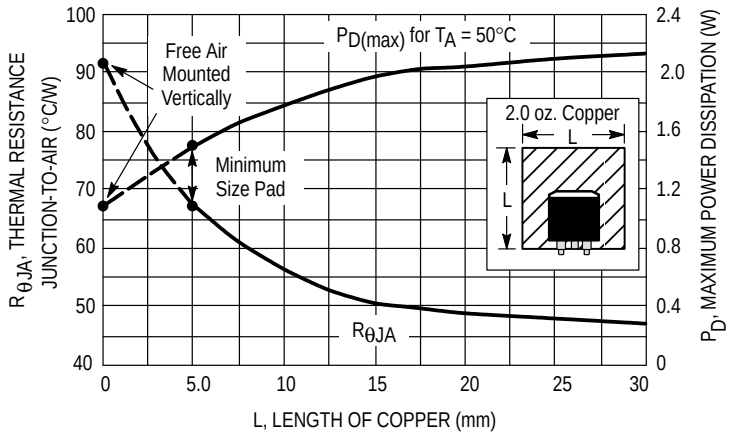

OUTLINE DIMENSIONS

Z SUFFIX
PLASTIC PACKAGE
CASE 29–04
(TO–226AA/TO–92)
ISSUE AD

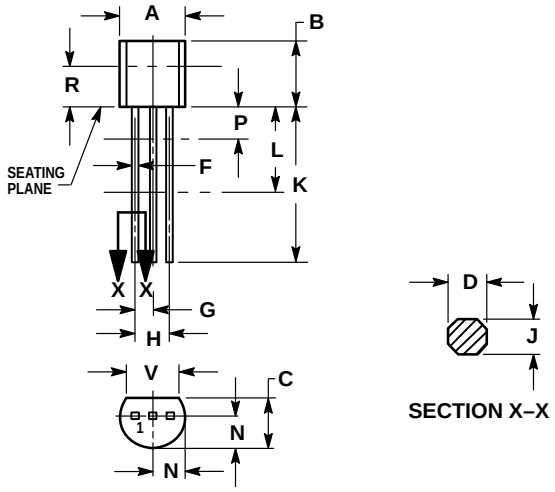

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

DT SUFFIX
PLASTIC PACKAGE
CASE 369A–13
(DPAK)
ISSUE Y

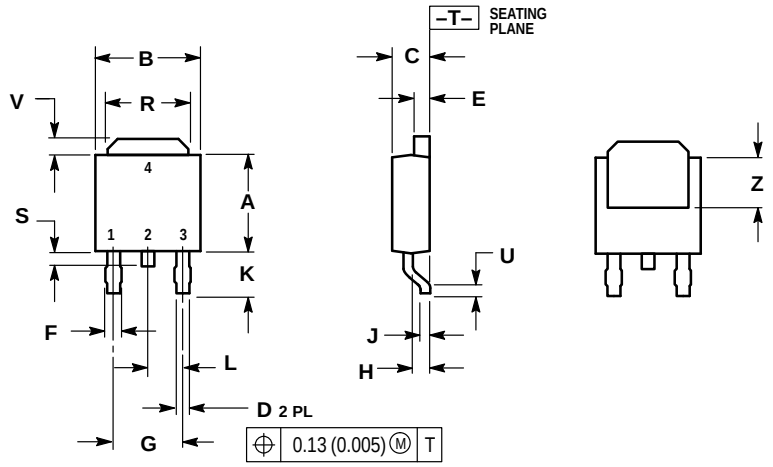

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.235	0.250	5.97	6.35
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.033	0.040	0.84	1.01
F	0.037	0.047	0.94	1.19
G	0.180 BSC		4.58 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.102	0.114	2.60	2.89
L	0.090 BSC		2.29 BSC	
R	0.175	0.215	4.45	5.46
S	0.020	0.050	0.51	1.27
U	0.020	—	0.51	—
V	0.030	0.050	0.77	1.27
Z	0.138	—	3.51	—

OUTLINE DIMENSIONS

N SUFFIX
PLASTIC PACKAGE
CASE 626–05
ISSUE K

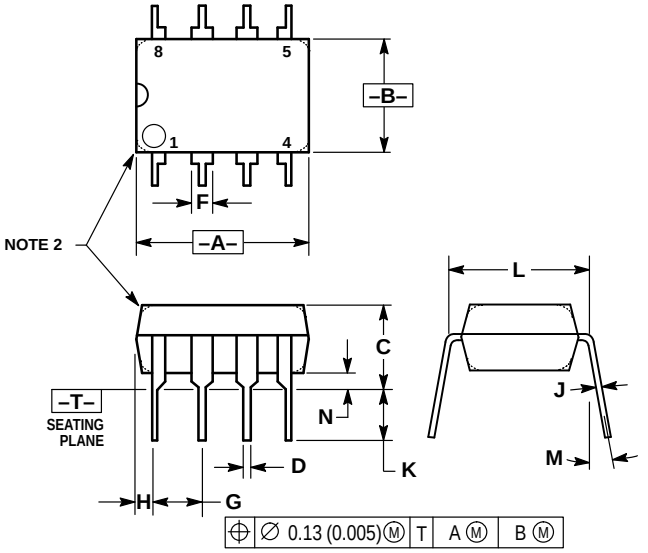

NOTES:
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	–	10°	–	10°
N	0.76	1.01	0.030	0.040

D SUFFIX
PLASTIC PACKAGE
CASE 751–05
(SO–8)
ISSUE R

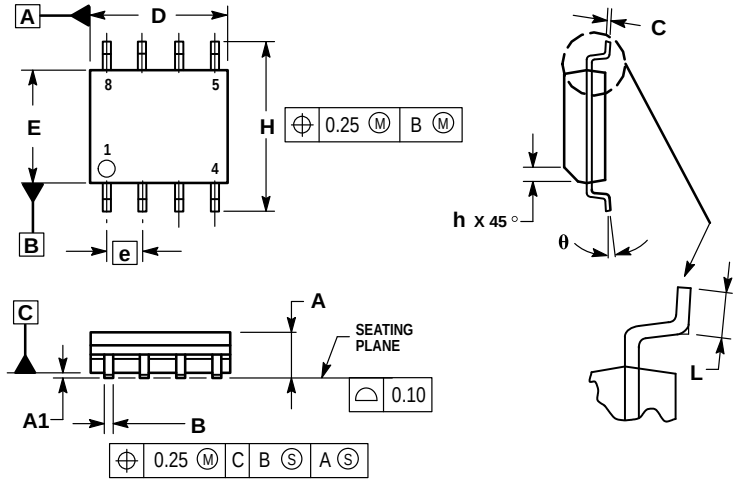

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSION D AND E DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.
5. DIMENSION B DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS	
DIM	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.35	0.49
C	0.18	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.25
θ	0°	7°

OUTLINE DIMENSIONS

DM SUFFIX
PLASTIC PACKAGE
CASE 846A–02
(Micro–8)
ISSUE C

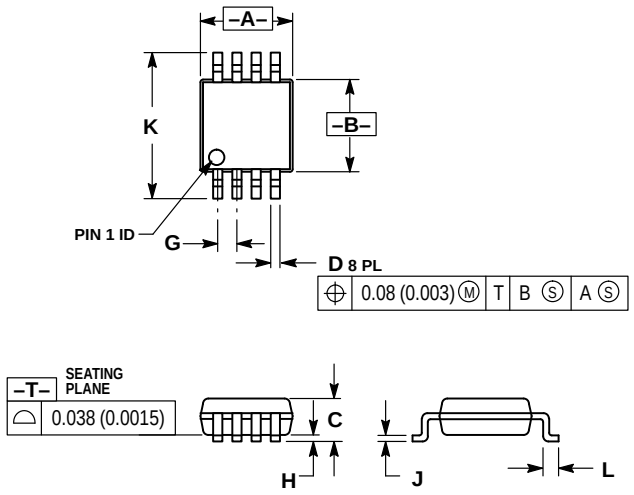

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	2.90	3.10	0.114	0.122
B	2.90	3.10	0.114	0.122
C	—	1.10	—	0.043
D	0.25	0.40	0.010	0.016
G	0.65 BSC		0.026 BSC	
H	0.05	0.15	0.002	0.006
J	0.13	0.23	0.005	0.009
K	4.75	5.05	0.187	0.199
L	0.40	0.70	0.016	0.028

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE / Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE 602–244–6609

INTERNET: http://Design–NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298